




TA30 MS

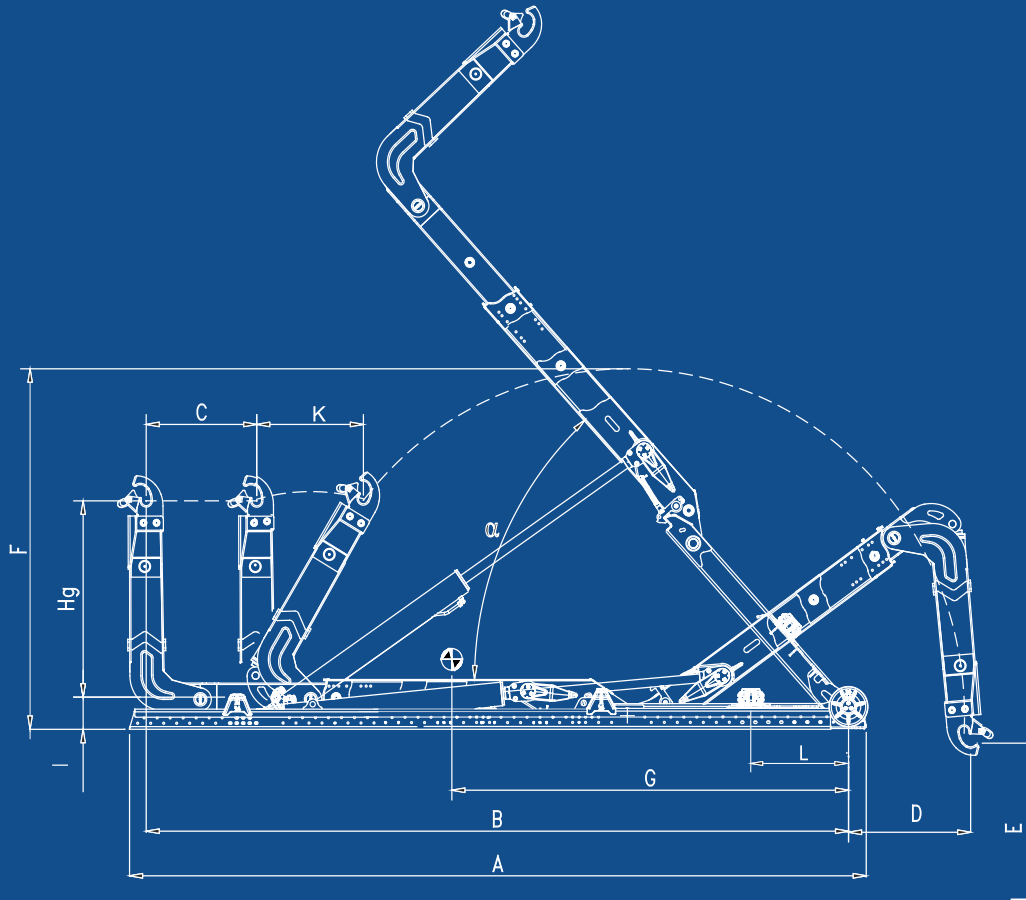

TA30 MS

| MODEL | HG | A | B | C | D | E | F | G | I | K | L | WEIGHT | α | CONTAINER | |
|------------|-----------|------|------|-----|------|-----|------|------|-----|-----|-----|---------|----------|-----------|------|
| | | | | | | | | | | | | | | MIN | MAX |
| TA30 C MS | 1425/1570 | 5100 | 4800 | 650 | 1240 | 100 | 2700 | 2700 | 260 | 850 | 400 | 2910 kg | 58° | 3600 | 5400 |
| TA30 NC MS | 1425/1570 | 5300 | 5000 | 850 | 1240 | 100 | 2700 | 2750 | 260 | 850 | 400 | 2910 kg | 54° | 3600 | 5600 |
| TA30 N MS | 1425/1570 | 5500 | 5200 | 850 | 1040 | 100 | 2700 | 2900 | 260 | 850 | 600 | 2940 kg | 51° | 3800 | 5800 |
| TA30 NL MS | 1425/1570 | 5700 | 5400 | 850 | 940 | 100 | 2700 | 3050 | 260 | 850 | 700 | 2970 kg | 48° | 4000 | 6000 |
| TA30 L MS | 1425/1570 | 5900 | 5600 | 850 | 740 | 100 | 2700 | 3200 | 260 | 850 | 900 | 3000 kg | 45° | 4200 | 6200 |

TAL30 MS

| MODEL | HG | A | B | C | D | F | G | I | K | L | WEIGHT | α | CONTAINER | |
|--------------|-----------|------|------|------|-----|------|------|------|------|-----|---------|----------|-----------|------|
| | | | | | | | | | | | | | MIN | MAX |
| TAL 30 C MS | 1425/1570 | 6100 | 5750 | 1150 | 850 | 2890 | 3250 | 1250 | 1300 | 950 | 3190 kg | 57° | 4200 | 6400 |
| TAL 30 NC MS | 1425/1570 | 6300 | 5950 | 1150 | 850 | 2890 | 3400 | 1050 | 1300 | 950 | 3220 kg | 53° | 4400 | 6600 |
| TAL 30 N MS | 1425/1570 | 6500 | 6150 | 1150 | 850 | 2890 | 3550 | 850 | 1100 | 950 | 3250 kg | 51° | 4600 | 6800 |
| TAL 30 NL MS | 1425/1570 | 6700 | 6350 | 1150 | 850 | 2890 | 3700 | 650 | 900 | 950 | 3270 kg | 48° | 4800 | 7000 |
| TAL 30 L MS | 1425/1570 | 6900 | 6550 | 1150 | 850 | 2890 | 3850 | 450 | 700 | 950 | 3300 kg | 45° | 5000 | 7200 |